

Поставляется Компанией  
«Новые Технологии»




**SOURIAU**  
Connection Technology





SOURIAU

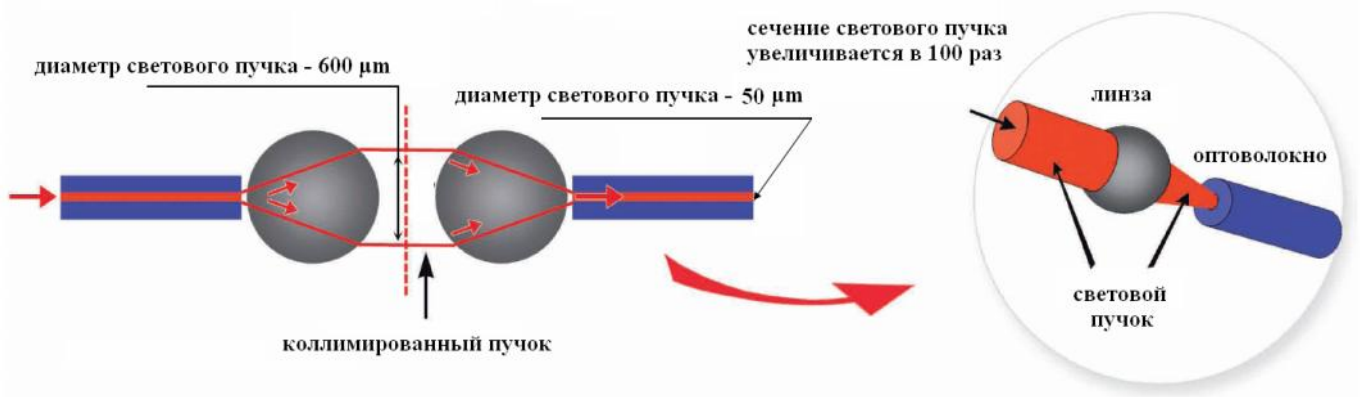



- : 9/125 -1.5 max
- 1310 / 1550
- 50/125 62.5/125 -1.0
- max 850 / 1300
- : > -28
- - 2000
- - -40°C +85°C
- - -60°C +85°C
- - 5
- - 500 1.2
- - 1200N
- - 1800N
- - 500

- - ARCAP
- -
- :
- ( 80%, .10%, 5%, 5%)
- (Grade 303,
- )
- - SEBS Co-Polymer
- - SEBS Co-Polymer
- - Nylon
- -
- -
- -

### Оптические контакты

1 контакт  
(1S)

2 контакта  
(2S)

4 контакта  
(4S)

6 контактов  
(6S)

### Гибридные схемы

2 оптических  
2 силовых  
2 сигнальных  
(6H)

2 оптических  
2 сигнальных  
(4H)

4 оптических  
2 силовых  
(6H)

Электрические контакты	
Тип	Калибр
Силовые	#16
Сигнальные	#20


- ( 1S 2S) - 5.0
- ( 4S) - 5.5
- ( 2S) - 5.0
- ( 4S) - 5.5
- ( 6S) - 6.0
- ( 1S 2S) - 25
- / ( 4S) - 28 /
- ( 2S) - 25 /
- ( 4S) - 28 /
- ( 6S) - 28 /
- ( ) 2000
- Max
- - -55°C +85°C
- - -70°C +85°C
- - 200 /

- - 1 / 100
- - 10
- -

	/		/	
	850	1300	850	1300
62.5/125	3.0	1.0	200	500
50/125	2.8	0.8	500	500

	/		/	
	1310	1550	1310	1550
9/125	0.38	0.25	3.5	18.0

	8HEB	7	R	2S	09	A	K	***
0:								
5:	Ø	7.5						
10.0								
6:	Ø	7.5						
7:								
R:								
A:								
K:	(	)						
	:							
	-							: 1, 2, 4, 6
	-							:
S -	(	)						
H -	(	+	)					
			:					
09:	SM 9/125							
50:	MM 50/125							
62:	MM 62.5/125							
	:	A, B, C						
K:	:							





« »

, . - ,

<http://www.novaspb.com>

./ : +7-812-458-75-90,  
+7-812-325-42-90,  
+7-812-325-42-91

[sales@novaspb.com](mailto:sales@novaspb.com)

[info@novaspb.com](mailto:info@novaspb.com)

197110, - , . , .34, 208

© 2012